


25GN

Heavy Duty Tandem Dual Gooseneck

G.V.W.R.	25,900#	AXLES	Two HD 10,000# Dual Wheel Electric Brakes (Oil Bath)
G.A.W.R. (Ea. Axle)	10,000#	SUSPENSION	44K Adjustable
COUPLER	2-5/16" Ball, Square Crank Type	TIRE	ST235/80 R-16 Load Range E Dual
SAFETY CHAINS	3/8" Grd. 70 w/Safety Latch Hook (2 each)	WHEEL	16 x 6 Dual 8 Bolt
JACKS	Dual Two Speed Landing Gear 50K Capacity (Bolted On)	FLOOR	2" Pine
NECK	12" I-Beam	LIGHTS	LED D.O.T. Stop, Tail, Turn & Clearance w/Ctr Turns
TOP RAIL	None	ELEC. PLUG	7-Way RV
FRAME	12" I-Beam	FINISH (Prep)	Steel is Cleaned to Ensure a Professional Smooth Finish.
CROSSMEMBERS	3" Channel	FINISH	Superior Quality Finish is Applied for a Highly Decorative and Protective Finish.
SIDE RAILS	8" Channel w/Rub Rail, Stake Pockets on 24" Centers, and Chain Spools		

Standard Features

- Safety Chains Attached w/Cold Rolled Eyelets
- 102" Overall Width
- Low Profile Bed, Pierced Frame
- 28' (Flat Deck) and Longer Include Torque Tube
- Lockable Toolbox Between GN Uprights
- 1-1/4" Pipe Chain Spool Between Stake Pockets
- Formed Crossmember to Frame Gussets
- Modular Sealed Wiring Harness
- Safety Reflective Marker Tape
- Rubber Mounted Sealed LED Lighting
- Two Heavy Duty 10,000# Oil Bath Axles
- Complete Break-A-Way System w/Battery & Charger
- Spare Tire Mount
- (2) Side Bed Steps
- 5' Dovetail w/Dble Hinged Spring Assist Fold Over Ramps

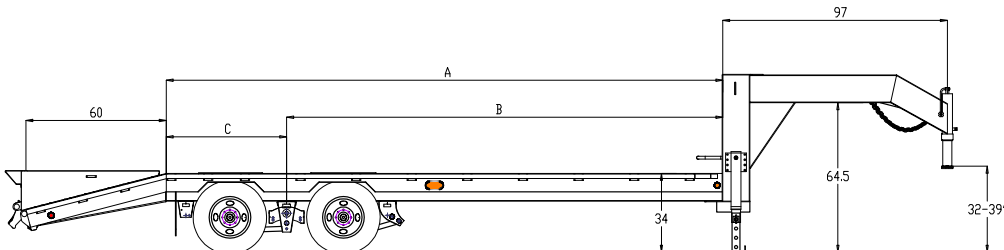

Dimensions w/Dovetail			
Model	A	B	C
20 + 5	240"	188"	52"
25 + 5	288"	232"	56"
28 + 5	336"	264"	72"
30 + 5	360"	280"	80"
32 + 5	384"	296"	88"
35 + 5	420"	320"	100"
36	432"	288"	144"
40	480"	320"	160"

MODEL#	WEIGHT	DESCRIPTION
25GN-20+5	6,490#	102" x 20' + 5' Tandem Dual 25,900# Gooseneck
25GN-25+5	7,230#	102" x 25' + 5' Tandem Dual 25,900# Gooseneck
25GN-28+5	7,760#	102" x 28' + 5' Tandem Dual 25,900# Gooseneck
25GN-30+5	8,020#	102" x 30' + 5' Tandem Dual 25,900# Gooseneck
25GN-32+5	8,320#	102" x 32' + 5' Tandem Dual 25,900# Gooseneck
25GN-35+5	8,780#	102" x 35' + 5' Tandem Dual 25,900# Gooseneck
25GN-36	7,840#	102" x 36' Tandem Dual 25,900# Gooseneck (Straight)
25GN-40	8,440#	102" x 40' Tandem Dual 25,900# Gooseneck (Straight)

OPTIONS

Air Brake w/ABS on Front, Spring Brake Chambers & Auto Slacks	Three Ramps w/Diamond Plate on Bottoms
Electric Over Hydraulic Brakes (Disc)	Three Folding Heel Ramps w/Diamond Plate on Bottoms
Spare Tire (235/80 R-16 LR-E Dual)	Deck on the Neck (6')
Tire Upgrade (235/R-16 LR-G Dual)	No Dovetail Option (Straight Deck)
Spare Tire Upgrade (235/R-16 LR-G Dual)	Pintle in Lieu of Gooseneck
Low Profile Tool Box 12" x 18" x 36" Side Mount	