

22GN Tandem Dual Axle Gooseneck


G.V.W.R. 22,500#	AXLES 2-GD10,000# Dual Wheel Electric Brakes (Oil Bath)
G.A.W.R. (Ea. Axle) 10,000#	SUSPENSION Multi-Leaf Slipper Spring w/Equalizer
COUPLER 2-5/16" Ball Adj. Square Crank Type	TIRE ST235/80 R-16 Load Range E Dual
SAFETY CHAINS 3/8" Grd. 70 w/Safety Latch Hook (2 each)	WHEEL 16 x 6 Dual 8 Bolt
JACKS Two 12K Drop Leg Jacks (Bolted On)	FLOOR 2" Pine
NECK 12" I-Beam	LIGHTS D.O.T. Stop, Tail, Turn & Clearance
TOP RAIL None	ELEC. PLUG 7-Way RV
FRAME 12" I-Beam	FINISH (Prep) Steel is Cleaned to Ensure a Professional Smooth Finish.
CROSSMEMBERS 3" Channel	FINISH Superior Quality Finish is Applied for a Highly Decorative and Protective Finish.
SIDE RAILS 6" Channel w/Rub Rail, Stake Pockets on 24" Centers, and Chain Spools	

Standard Features

- Safety Chains Attached w/Cold Rolled Eyelets
- Two Bolted On Jacks w/Greasable Handle (PH has Single TW Drop-Leg Jack)
- 102" Overall Width
- Low Profile Bed, Pierced Frame
- 28' (Flat Deck) and Longer Include Torque Tube
- Lockable Toolbox Between GN Uprights
- Formed Crossmember to Frame Gusssets
- Modular Sealed Wiring Harness
- 1-1/4" Pipe Chain Spool Between Stake Pockets
- Safety Reflective Marker Tape
- Two 10,000# Oil Bath Axles
- Complete Break-A-Way System w/Battery & Charger
- Radial Tires
- Spare Tire Mount
- Rubber Mounted Sealed Lighting
- (2) Side Bed Steps
- 5' Dovetail w/Dble Hinged Spring Assist Fold Over Ramps

Dimensions w/Dovetail

Model	A	B	C
20 + 5	240"	196"	44"
25 + 5	288"	232"	56"
28 + 5	336"	264"	72"
30 + 5	360"	280"	80"
32 + 5	384"	296"	88"
35 + 5	420"	320"	100"
36	432"	288"	144"
40	480"	320"	160"

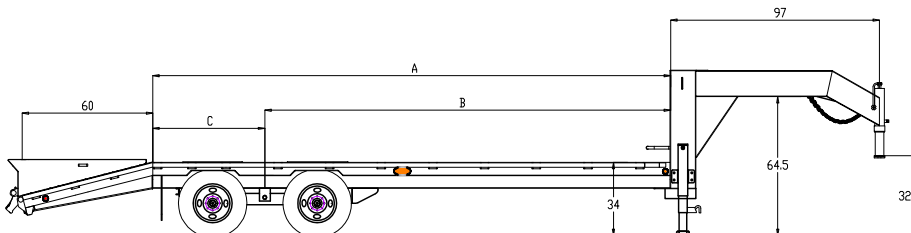

MODEL#	WEIGHT	DESCRIPTION
22GN-20+5	5,680#	102" x 20' + 5' Tandem Dual 22,500# Gooseneck
22GN-25+5	6,344#	102" x 25' + 5' Tandem Dual 22,500# Gooseneck
22GN-28+5	6,840#	102" x 28' + 5' Tandem Dual 22,500# Gooseneck
22GN-30+5	7,180#	102" x 30' + 5' Tandem Dual 22,500# Gooseneck
22GN-32+5	7,520#	102" x 32' + 5' Tandem Dual 22,500# Gooseneck
22GN-35+5	7,720#	102" x 35' + 5' Tandem Dual 22,500# Gooseneck
22GN-36	7,460#	102" x 36' Tandem Dual 22,500# Gooseneck
22GN-40	8,060#	102" x 40' Tandem Dual 22,500# Gooseneck

OPTIONS

Dual 2 Speed Landing Gear	5' Center Pop-Up Dovetail w/5' Fold Up Ramps
Electric over Hydraulic Brakes (Drum)	Three Ramps w/Diamond Plate on Bottoms
Spare Tire (ST235/80 R-16 LR-E Dual)	Three Folding Heel Ramps w/Diamond Plate on Bottoms
L.E.D. Lighting	No Dovetail Option (Straight Deck)
Low Profile Tool Box 12" x 18" x 36" (Side Mount)	Pintle in Lieu of Gooseneck
Deck on the Neck (6')	